










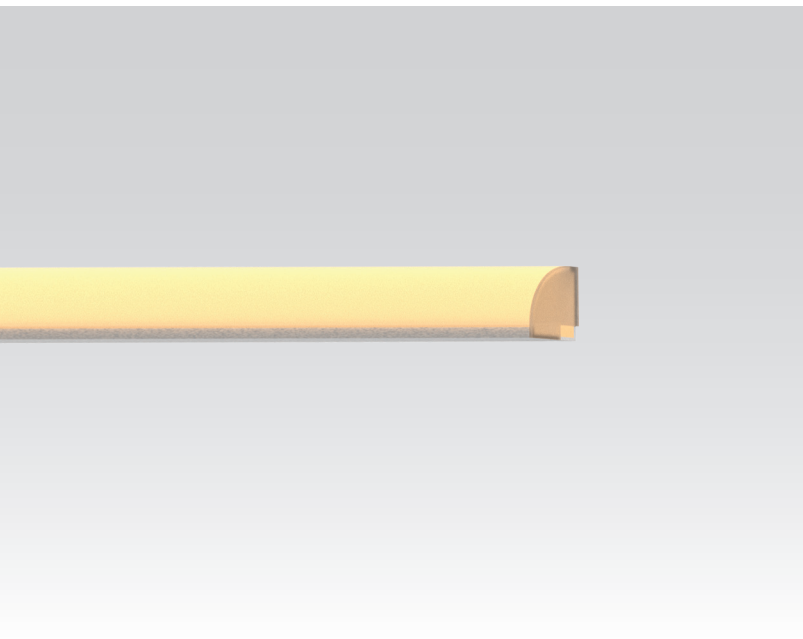

LP10C


CORNER LINEAR PROFILE LUMINAIRE




AVAILABLE OPTIONS

COLOUR OPTIONS	SILVER ANODIZED 
CCT OPTIONS	SINGLE CCT  2400K 2700K 3000K 3500K 4000K 5000K  ProART
WIRE END & EXIT CONFIGURATIONS OPTIONS	 Single Wire End, End Cap Exit  Double Wire End, End Cap Exit
ACCESSORIES	 Mounting Clip  UniLink Mounting Clip  FlexiLink Mounting Clip

DIMENSIONS (MM)



PHOTOMETRICS






Cove _Indoor Lighting

Profile Type	10mm width aluminium linear profile
Profile Finishing	Silver Anodised
Cover	Diffused
Light Uniformity	Dot-less
Mounting	Surface, with stainless steel mounting clip
Beam Angle	120°
Compatible LED Module	FM5
CRI	ProART (CRI~95)
SDCM	3 step MacAdam ellipse binning
Lifetime	Up to 50,000 hours L80 lamp life at Ta = 25°C
Voltage	24V DC
Maximum Power	15W/m
Length Options	503mm or 1000mm
Operating Temperature	Ta (min) = -25°C, Ta (max) = +50°C
Wire Connection	Supplied with insulated wires at 150mm length
IP Rating	IP40 or IP54
Profile LOR	62%

SPECIFICATIONS

CCT	Efficacy (lm/W)	Default (Max.) 15W/m	Luminous Flux per meter (lm/m)							
			With CVMPS150 Dip Switch Settings *							
			On "8"	On "7"	On "6"	On "5"	On "4"	On "3"	On "2"	On "1"
2400K	58.7	880	13.5W/m	12W/m	10.5W/m	9W/m	7.5W/m	6W/m	4.5W/m	3W/m
2700K			792	704	616	528	440	352	264	176
3000K			921	818	716	614	512	409	307	205
3500K										
4000K	71.6	1074	967	859	752	644	537	430	322	215
5000K										
Correction Factor		1.00	0.90	0.80	0.70	0.60	0.50	0.40	0.30	0.20



ORDERING MATRIX

Profile	Finishing		Cover		Length		LED Module Power & CCT				Wire End & Exit Configuration		Ingress Protection	
	SL	Silver Anodised	D	Diffused	500	500mm	15	15W/m	24	2400K	SE	Single Wire End, End Cap Exit	IP40	IP40
LP10C					1000	1000mm			27	2700K	DE	Double Wire End, End Cap Exit	IP54	IP54
									30	3000K				
									35	3500K				
									40	4000K				
									50	5000K				

*Every linear profiles is supplied with 2 mounting clips

Example: LP10C-SL-D-1000-15-30-SE-IP40
LP10C Profile, Silver Anodised, Diffused cover, 1000mm, with FM8 - 15W/m, 3000K, Single Wire End at End Cap Exit, IP40, Including 2 x End Cap & 2 x Mounting Clip



LINEAR PROFILE AND ACCESSORIES

(Ordering Matrix for Separate Orders)

LP10C

Profile	Diffuser	Length
LP10C	D Diffused	500 500mm
		1000 1000mm
		2000 2000mm

Example: LP10C-D-2000
LP10C Profile, Diffused lens, 2000mm

End Cap
LP10C-EC

Example: LP10C-EC
LP10C End Cap

Mounting Clip
LP10C-MC

Example: LP10C-MC
LP10C Mounting Clip

UniLink Mounting Clip
LP10C-UMC

Example: LP10C-UMC
LP10C UniLink Mounting Clip

FlexiLink Mounting Clip
LP10C-FMC

Example: LP10C-FMC
LP10C FlexiLink Mounting Clip

LP16C

Profile	Diffuser	Length
LP16C	D Diffused	500 500mm
		1000 1000mm
		2000 2000mm

Example: LP16C-D-2000
LP16C Profile, Diffused lens, 2000mm

End Cap
LP16C-EC

Example: LP16C-EC
LP16C End Cap

Mounting Clip
LP16C-MC

Example: LP16C-MC
LP16C Mounting Clip

UniLink Mounting Clip
LP16C-UMC

Example: LP16C-UMC
LP16C UniLink Mounting Clip


FlexiLink Mounting Clip
LP16C-FMC

Example: LP16C-FMC
LP16C FlexiLink Mounting Clip



MOUNTING METHOD

UniLink Mounting Clip

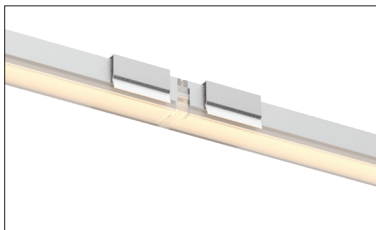

FlexiLink Mounting Clip

