


LYNX

LINEAR SERIES

A series of modern aesthetic slim profile linear downlight luminaires that fit in well with contemporary interior designing features, designed with double optical stages that create uniform circular light beam with minimal glare.

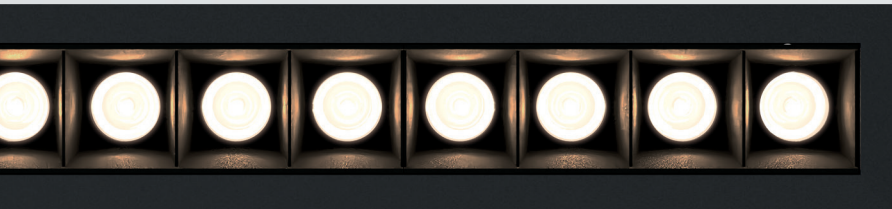

Fixture Features




IP66

Module Colour Temperature Variation



ProART

Beam Angle



Driver Dimming Variation



(ND)



(PH)




(AN)




(DA)

LYNX 8


16W SLIM LINEAR RECESSED DOWNLIGHT



#FIX
#TRIM



#TILT
#TRIM



#FIX
#TRIMLESS



#FIX
#TRIM
#IP66

TECHNOLOGY AND FEATURES



Low Flicker,
No Risk
(IEEE 1789)

AVAILABLE OPTIONS

FIXTURE
COLOUR OPTIONS

Trim Colour
Options


MATT WHITE RAL9003

MATT BLACK RAL9011




LED MODULE

SINGLE CCT



2700K 3000K 3500K 4000K 5000K ProART



DRIVER
DIMMING



(ND) (PH) (AN) (DA)

LYNX 8

SPECIFICATIONS

Family Type	Lynx Series
Mains Voltage	220-240V, 50Hz
Typical Operating Voltage	24V
Typical Operating Current	700mA
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10
Beam Angles	13°, 29°, 41°, 60°, 16°x36°
Colour Temperatures	2700K, 3000K, 3500K, 4000K, 5000K
CRI	High Efficiency (CRI~85), ProART (CRI~95)
SDCM	3 steps MacAdam ellipse binning
Driver (Dimming)	Non-dim, phase (leading & trailing edge), 0-10V, DALI
Mains Connection	Push-pin or screw terminals for convenient connection
Materials	Aluminium, plastic
Fire Safety	Glow wire test 850°C, UL94V-0, VW-1
Flammability Mark	F
Ingress Protection	IP40
Safety Class	Class 2
Standards	IEC 60598-1, IEC 61347-2-13
Regulatory Markings	CE, CB, CCC, RCM, BIS, TIS, SIRIM-ST, RoHS
Weight	0.4kg

DIMENSIONS (MM)

