

SPACE² LITE

MAGNETIC TRACK SERIES


A slimmer 48V powered extra low voltage magnetic track system that is modest yet utmost versatile. Space2 Lite magnetic track series includes a wider variety of luminaire selections that can be flexibly attached and positioned onto the track to obtain the optimum illumination for all kinds of spaces.



Module Colour Temperature Variation



Beam Angle

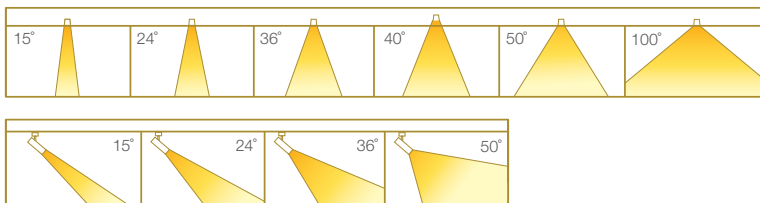

Driver Dimming Variation












SPACE² LITE DOT LIGHT FIX


30W / 20W / 10W MAGNETIC TRACK LUMINAIRE

30W

20W

10W

AVAILABLE OPTIONS	
FIXTURE COLOUR OPTIONS	Trim Colour Options <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>MATT WHITE RAL9003</p>  </div> <div style="text-align: center;"> <p>MATT BLACK RAL9011</p>  </div> </div>
LED MODULE	SINGLE CCT <div style="display: flex; align-items: center; gap: 10px;"> <div style="text-align: center;"> <p>2700K</p>  </div> <div style="text-align: center;"> <p>3000K</p>  </div> <div style="text-align: center;"> <p>4000K</p>  </div> <div style="text-align: center;"> <p>ProART</p>  </div> </div> <div style="margin-top: 10px;">  <p>24°</p> </div>
DRIVER DIMMING	<div style="display: flex; gap: 10px;"> <div style="text-align: center;">  <p>(ND)</p> </div> <div style="text-align: center;">  <p>(DA)</p> </div> </div>

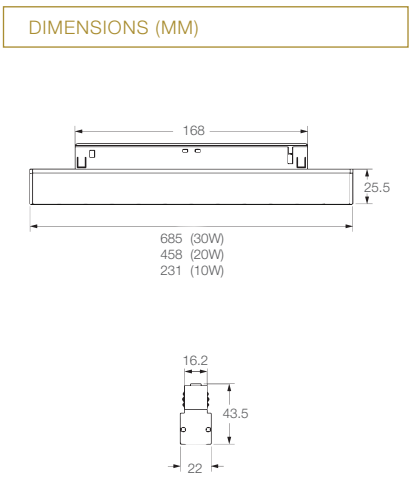


SPECIFICATIONS

Family Type	Space ² Lite Series
Input Voltage	48V DC Constant Voltage
Input Voltage	30W, 20W, 10W
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10
Beam Angles	24°
Colour Temperatures	2700K, 3000K, 4000K
CRI	ProART (CRI-95)
SDCM	3 steps MacAdam ellipse binning
Driver (Dimming)	Non-dim, DALI
Mains Connection	Magnetic track
Materials	Aluminium, plastic
Fire Safety	VW-1
Flammability Mark	F
Ingress Protection	IP40
Regulatory Markings	CE, CCC, RoHS

PHOTOMETRICS

SPACE2 LITE DOT LIGHT FIX



Height (m)		E _{max} (lx)	SPACE ² LITE DOT LIGHT FIX 30W / 20W / 10W		Luminous Flux (lm)
			Input Power	CRI	3000K
1	E(0°)	3546	30W	ProART CRI-95	24°
	Cone Ø 0° (m)	0.51			
	Cone Ø 90° (m)	0.51			
2	E(0°)	887	20W	ProART CRI-95	1000
	Cone Ø 0° (m)	1.01			
	Cone Ø 90° (m)	1.03			
3	E(0°)	394	10W	ProART CRI-95	500
	Cone Ø 0° (m)	1.52			
	Cone Ø 90° (m)	1.54			
4	E(0°)	222	Data are based on maximum output at highest CCT (6000K). 2700K will have a nominal data value of 10% lower than published. Nominal CRI-95, equals to Ra>90-97, R9>50		
	Cone Ø 0° (m)	2.02			
	Cone Ø 90° (m)	2.05			
5	E(0°)	142			
	Cone Ø 0° (m)	2.53			
	Cone Ø 90° (m)	2.57			

Correction Factor: SPACE² LITE DOT LIGHT FIX 20W - f = 0.71
SPACE² LITE DOT LIGHT FIX 10W - f = 0.36

ORDERING MATRIX CHART

Type	Fixture		Colour		Input Power		Beam Angle		Colour Temp		CRI		Driver			
	Angle															
SL-DOT	FX	Fix	WH	Matt White	30	30W	24	24°	27	2700K	PA	ProART	ND	Non-Dim		
				MB		Matt Black		20		20W				30	3000K	DA
							10	10W			40	4000K				

example: SL-DOT.FX.MB.20.24.30.PA.DA