

# SPACE<sup>2</sup> LITE

## MAGNETIC TRACK SERIES


A slimmer 48V powered extra low voltage magnetic track system that is modest yet utmost versatile. Space2 Lite magnetic track series includes a wider variety of luminaire selections that can be flexibly attached and positioned onto the track to obtain the optimum illumination for all kinds of spaces.



### Module Colour Temperature Variation



Beam Angle

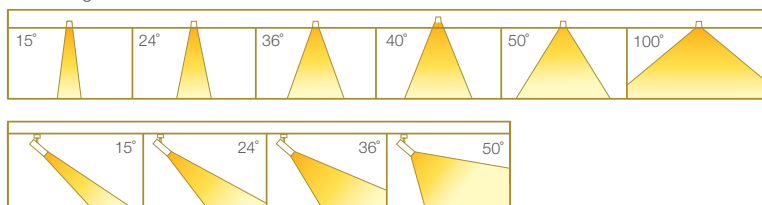

### Driver Dimming Variation











# SPACE<sup>2</sup> LITE DOT LIGHT TILT


12W / 6W MAGNETIC TRACK LUMINAIRE



### AVAILABLE OPTIONS

<p><b>FIXTURE</b> COLOUR OPTIONS</p>	<p>Trim Colour Options</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>MATT WHITE RAL9003</p>  </div> <div style="text-align: center;"> <p>MATT BLACK RAL9011</p>  </div> </div>
<p><b>LED MODULE</b></p>	<p>SINGLE CCT</p> <div style="display: flex; align-items: center;"> <div style="display: flex; gap: 5px;"> <div style="width: 15px; height: 15px; background-color: #f9a825; border: 1px solid black;"></div> <div style="width: 15px; height: 15px; background-color: #f0e68c; border: 1px solid black;"></div> <div style="width: 15px; height: 15px; background-color: #a2c4c9; border: 1px solid black;"></div> </div> <div style="margin-left: 10px;">  <p>ProART</p> </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 5px;"> <div style="text-align: center;"> <p>15°</p>  </div> <div style="text-align: center;"> <p>24°</p>  </div> <div style="text-align: center;"> <p>40°</p>  </div> </div>
<p><b>DRIVER</b> DIMMING</p>	<div style="display: flex; gap: 10px;"> <div style="text-align: center;">  <p>(ND)</p> </div> <div style="text-align: center;">  <p>(DA)</p> </div> </div>

### DIMENSIONS (MM)

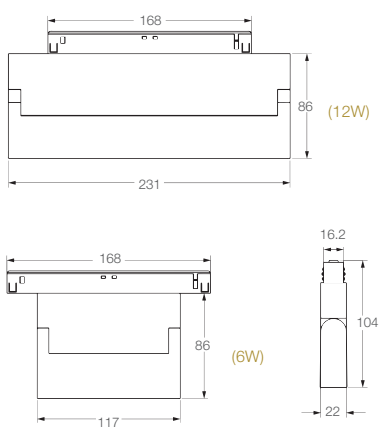

SPECIFICATIONS

Family Type	Space <sup>2</sup> Lite Series
Input Voltage	48V DC Constant Voltage
Input Voltage	12W, 6W
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10
Beam Angles	15°, 24°, 40°
Colour Temperatures	2700K, 3000K, 4000K
CRI	ProART (CRI-95)
SDCM	3 steps MacAdam ellipse binning
Driver (Dimming)	Non-dim, DALI
Mains Connection	Magnetic track
Materials	Aluminium, plastic
Fire Safety	VW-1
Flammability Mark	F
Ingress Protection	IP40
Regulatory Markings	CE, CCC, RoHS

PHOTOMETRICS

SPACE2 LITE DOT LIGHT TILT

Height (m)		Emax (lx)			SPACE <sup>2</sup> LITE DOT LIGHT TILT 12W / 6W		Luminous Flux (lm)
		15°	24°	40°	Input Power	CRI	3000K 15°, 24°, 40°
1	E(0°)	4862	3152	1182	12W	ProART CRI-95	1000
	Cone Ø 0° (m)	0.37	0.49	0.79			
	Cone Ø 90° (m)	0.33	0.68	1.00			
2	E(0°)	1215	788	296	6W	ProART CRI-95	500
	Cone Ø 0° (m)	0.74	0.99	1.58			
	Cone Ø 90° (m)	0.66	1.37	1.99			
3	E(0°)	540	350	131	<small>Data are based on maximum output at highest CCT (6000K). 2700K will have a nominal data value of 10% lower than published. Nominal CRI-95, equals to Ra&gt;90-97, R9&gt;50</small>		
	Cone Ø 0° (m)	1.11	1.48	2.38			
	Cone Ø 90° (m)	0.98	2.05	2.99			
4	E(0°)	304	197	74			
	Cone Ø 0° (m)	1.48	1.98	3.17			
	Cone Ø 90° (m)	1.31	2.74	3.99			
5	E(0°)	194	126	47			
	Cone Ø 0° (m)	1.85	2.47	3.96			
	Cone Ø 90° (m)	1.64	3.42	4.99			

Correction Factor: SPACE<sup>2</sup> LITE DOT LIGHT TILT 6W - f = 0.50

ORDERING MATRIX CHART

Fixture			LED Module				Driver				
Type	Angle	Colour	Input Power		Beam Angle		Colour Temp		CRI	Dimming	
SL-DOT	TL   Tilt	WH   Matt White	12	12W	15	15°	27	2700K	PA   ProART	ND   Non-Dim	DA   DALI
		MB   Matt Black									
						40	40°	40			

example: SL-DOT.TL.MB.6.15.30.PA.DA