


SPACE² LITE

MAGNETIC TRACK SERIES

A slimmer 48V powered extra low voltage magnetic track system that is modest yet utmost versatile. Space2 Lite magnetic track series includes a wider variety of luminaire selections that can be flexibly attached and positioned onto the track to obtain the optimum illumination for all kinds of spaces.



Module Colour Temperature Variation

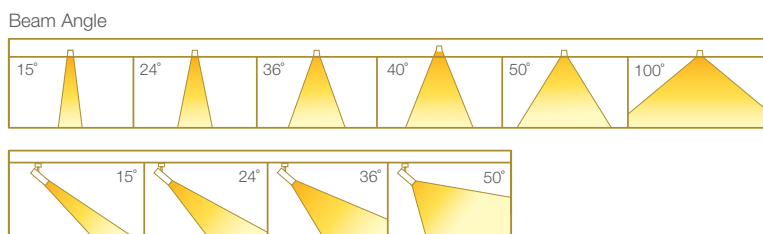

Driver Dimming Variation



SPACE² LITE OPAL LIGHT FIX

30W / 20W / 10W MAGNETIC TRACK LUMINAIRE

30W

20W

10W

AVAILABLE OPTIONS

FIXTURE COLOUR OPTIONS

Trim Colour
Options

MATT WHITE RAL9003

MATT BLACK RAL9011

LED MODULE

SINGLE CCT

2700K 3000K 4000K



ProART

100°



DRIVER DIMMING




(ND)




(DA)

DIMENSIONS (MM)



730 (30W)
488 (20W)
246 (10W)



SPECIFICATIONS

Family Type	Space ² Lite Series
Input Voltage	48V DC Constant Voltage
Input Power	30W, 20W, 10W
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10
Beam Angles	100°
Colour Temperatures	2700K, 3000K, 4000K
CRI	ProART (CRI-95)
SDCM	3 steps MacAdam ellipse binning
Driver (Dimming)	Non-dim, DALI
Mains Connection	Magnetic track
Materials	Aluminium, plastic
Fire Safety	VW-1
Flammability Mark	F
Ingress Protection	IP40
Regulatory Markings	CE, CCC, RoHS

PHOTOMETRICS

SPACE2 LITE OPAL LIGHT FIX

Height (m)	E(0°)	Emax (lx)	SPACE ² LITE OPAL LIGHT FIX 30W / 20W / 10W		Luminous Flux (lm)
			Input Power	CRI	3000K
1	506	506	30W	ProART CRI-95	1100
	2.38	2.38			
	1.63	1.63			
2	126	126	20W	ProART CRI-95	800
	4.77	4.77			
	3.26	3.26			
3	56	56	10W	ProART CRI-95	400
	7.15	7.15			
	4.89	4.89			
4	32	32	Data are based on maximum output at highest CCT (6000K). 2700K will have a nominal data value of 10% lower than published. Nominal CRI-95, equals to Ra>90-97, R9>50		
	9.53	9.53			
	6.52	6.52			
5	20	20			
	11.92	11.92			
	8.16	8.16			

Correction Factor: SPACE² LITE OPAL LIGHT FIX 20W - f = 0.73
SPACE² LITE OPAL LIGHT FIX 10W - f = 0.36

ORDERING MATRIX CHART

Fixture			LED Module					Driver						
Type	Angle	Colour	Input Power		Beam Angle		Colour Temp		CRI	Dimming				
SL-OPAL	FX	Fix	WH	Matt White	30	30W	100	100°	27	2700K	PA	ProART	ND	Non-Dim
									30	3000K			DA	DALI
									40	4000K				

example: SL-OPAL.FX.MB.20.100.30.PA.DA