

SPACE² LITE

MAGNETIC TRACK SERIES


A slimmer 48V powered extra low voltage magnetic track system that is modest yet utmost versatile. Space2 Lite magnetic track series includes a wider variety of luminaire selections that can be flexibly attached and positioned onto the track to obtain the optimum illumination for all kinds of spaces.



Module Colour Temperature Variation



Beam Angle

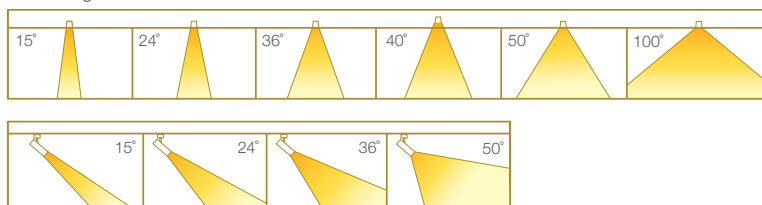

Driver Dimming Variation




























SPACE² LITE SPOTLIGHT TILT


15W / 12W / 8W / 5W MAGNETIC TRACK LUMINAIRE



AVAILABLE OPTIONS

FIXTURE COLOUR OPTIONS	Trim Colour Options MATT WHITE RAL9003 MATT BLACK RAL9011 CHROME GOLD							
	<table border="1"> <tr> <td>MATT WHITE RAL9003</td> <td></td> <td></td> <td></td> </tr> <tr> <td>MATT BLACK RAL9011</td> <td></td> <td></td> <td></td> </tr> </table>	MATT WHITE RAL9003				MATT BLACK RAL9011		
MATT WHITE RAL9003								
MATT BLACK RAL9011								
ACCESSORIES	 Honeycomb Anti-Glare Louvre							
LED MODULE	SINGLE CCT  2700K  3000K  4000K  ProART 							
DRIVER DIMMING	 (ND)  (DA)							

DIMENSIONS (MM)

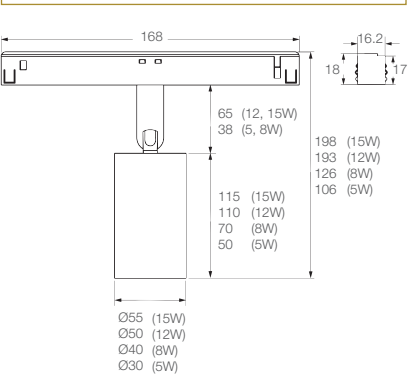

SPECIFICATIONS

Family Type	Space ² Lite Series
Input Voltage	48V DC Constant Voltage
Input Voltage	15W, 12W, 8W, 5W
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10
Beam Angles	15°, 24°, 36°, 50°
Colour Temperatures	2700K, 3000K, 4000K
CRI	ProART (CRI-95)
SDCM	3 steps MacAdam ellipse binning
Driver (Dimming)	Non-dim, DALI
Mains Connection	Magnetic track
Materials	Aluminium, plastic
Fire Safety	VW-1
Flammability Mark	F
Ingress Protection	IP40
Regulatory Markings	CE, CCC, RoHS

PHOTOMETRICS

SPACE2 LITE SPOTLIGHT TILT

Height (m)		Emax (lx)				SPACE2 LITE SPOTLIGHT TILT 15W / 12W / 8W / 5W		Luminous Flux (lm)
		15°	24°	36°	50°	Input Power	CRI	3000K 15°, 24°, 36°, 50°
1	E(0°)	8131	6070	2821	1565	15W	ProART CRI-95	1200
	Cone Ø (m)	0.35	0.44	0.68	0.92			
2	E(0°)	2033	1517	705	391	12W	ProART CRI-95	1000
	Cone Ø (m)	0.70	0.89	1.35	1.85			
3	E(0°)	903	674	313	174	8W	ProART CRI-95	630
	Cone Ø (m)	1.05	1.33	2.03	2.77			
4	E(0°)	508	379	176	98	5W	ProART CRI-95	400
	Cone Ø (m)	1.40	1.77	2.71	3.70			
5	E(0°)	325	243	113	63	Data are based on maximum output at highest CCT (6000K). 2700K will have a nominal data value of 10% lower than published. Nominal CRI-95, equals to Ra>90-97, R9>50		
	Cone Ø (m)	1.75	2.22	3.38	4.62			

Correction Factor: SPACE2 LITE SPOTLIGHT TILT 12W - f = 0.83
SPACE2 LITE SPOTLIGHT TILT 8W - f = 0.53
SPACE2 LITE SPOTLIGHT TILT 5W - f = 0.33

ORDERING MATRIX CHART

Type	Fixture						LED Module				Driver								
	Angle		Colour		Reflector Colour		Accessories		Input Power		Beam Angle		Colour Temp		CRI		Dimming		
SL-SPOTLIGHT	TL	Tilt	WH	Matt White	WH	Matt White	N	None	15	15W	15	15°	27	2700K	PA	ProART	ND	Non-Dim	
				MB		Matt Black		MB											Matt Black
										8	8W	36	36°	40	4000K				
										5	5W	50	50°						

example: SL-SPOTLIGHT.TL.MB.MB.N.12.15.30.PA.DA