

SPACE²

MAGNETIC TRACK SERIES


A premium 48V powered extra low voltage magnetic track system with superior aesthetics and built quality. Space2 magnetic track series includes a selection of different luminaires forms that are magnetically attached onto the track and can be flexibly positioned or interchanged at any time for various illumination applications within spaces.



Module Colour Temperature Variation



Beam Angle

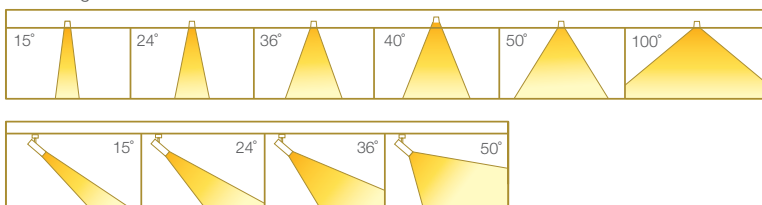

Driver Dimming Variation



(ND)




(DA)









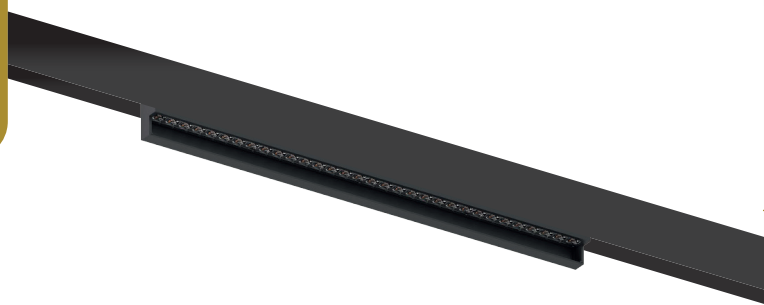


(DA)
DALI PART
209


SPACE² WALLWASH LIGHT

15W MAGNETIC TRACK LUMINAIRE



AVAILABLE OPTIONS	
FIXTURE COLOUR OPTIONS	Trim Colour Options
	MATT BLACK RAL9011 
LED MODULE	SINGLE CCT  2700K  3000K  4000K  ProART
	 26° X 28° AT 14° OPTICAL TILT
DRIVER DIMMING	 (ND)  (AN)  (DA)

DIMENSIONS (MM)

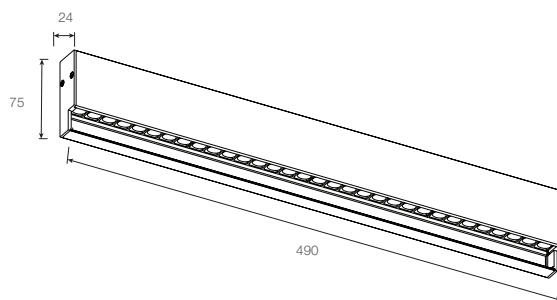

SPECIFICATIONS

Family Type	Space ² Series
Input Voltage	48V DC Constant Voltage
Input Voltage	15W
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10
Beam Angles	26° x 28° at 14° optical tilt
Colour Temperatures	2700K, 3000K, 4000K
CRI	ProART (CRI-95)
SDCM	3 steps MacAdam ellipse binning
Driver (Dimming)	Non-dim, 0-10V, DALI
Mains Connection	Magnetic track
Materials	Aluminium, plastic
Fire Safety	VW-1
Flammability Mark	F
Ingress Protection	IP40
Regulatory Markings	CE, CCC, RoHS

PHOTOMETRICS

SPACE2 WALLWASH LIGHT

Meter		E _{max} (lx)	SPACE ² WALLWASH 15W		Luminous Flux (lm)
			Input Power	CRI	3000K
		26° x 28°			26° x 28° at 14° Optical Tilt
1	E (14°)	1861	15W	ProART CRI-95	600
2	E (14°)	465			
3	E (14°)	207			
4	E (14°)	116			
5	E (14°)	74			

Data are based on maximum output at highest CCT (6000K). 2700K will have a nominal data value of 10% lower than published. Nominal CRI-95, equals to Ra>90-97, R9>50

ORDERING MATRIX CHART

Fixture		LED Module						Driver			
Type	Colour	Input Power		Beam Angle		Colour Temp		CRI		Dimming	
S-WALLWASH	MB Matt Black	15	15W	26X28	26° x 28°	27	2700K	PA	ProART	ND	Non-Dim
						30	3000K			AN	0-10V
						40	4000K			DA	DALI

example: S-WALLWASH.MB.15.26X28.30.PA.ND