


# SPACE<sup>2</sup> XL tuneWHITE

## MAGNETIC TRACK SERIES


A premium 48V powered extra low voltage magnetic track system with superior aesthetics and built quality. Space2 magnetic track series includes a selection of different luminaires forms that are magnetically attached onto the track and can be flexibly positioned or interchanged at any time for various illumination applications within spaces.

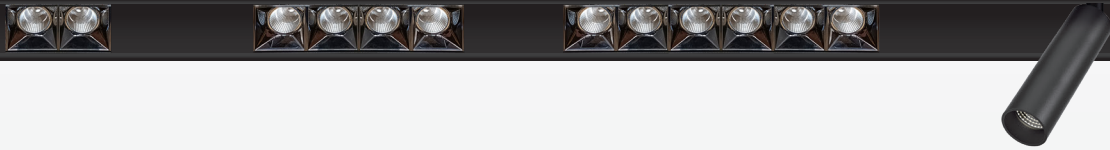

### Module Colour Temperature Variation



Beam Angle

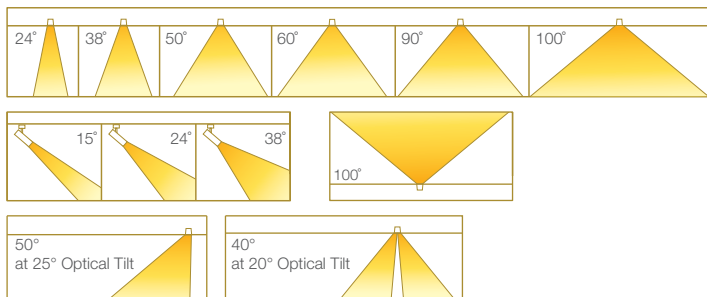

### Driver Dimming Variation



(DT8)



(CSB)


# SPACE<sup>2</sup> XL tuneWHITE DOT LIGHT FIX

18.9W / 12.6W / 6.3W MAGNETIC TRACK  
TUNABLE WHITE LUMINAIRE

18.9W

12.6W

6.3W



AVAILABLE OPTIONS	
<b>FIXTURE</b> COLOUR OPTIONS	<p>MATT BLACK RAL9011</p>
<b>LED MODULE</b>	<p>tuneWHITE</p> <p>1800K 3100K 1800K 4000K 2700K 6500K</p> <p>tuneWHITE™ ProART</p> <p>24° 38° 50°</p>
<b>DRIVER</b> DIMMING	<p>(DT8) (CSB)</p>

DIMENSIONS (MM)	
<p>168</p>	<p>55 41</p>
<p>80 (6.3W)</p>	
<p>157 (12.6W)</p>	
<p>233 (18.9W)</p>	

SPECIFICATIONS

Family Type	Space <sup>2</sup> XL Series
Input Voltage	48V DC Constant Voltage
Input Power	18.9W, 12.6W, 6.3W
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10
Beam Angles	24°, 38°, 50°
Colour Temperatures	tuneWHITE 1800K - 3100K, tuneWHITE 1800K - 4000K, tuneWHITE 2700K - 6500K
CRI	ProART (CRI-95)
SDCM	3 steps MacAdam ellipse binning
Driver (Dimming)	DALI device type 8, Casambi
Mains Connection	Magnetic track
Materials	Aluminium, plastic
Fire Safety	VW-1
Flammability Mark	F
Ingress Protection	IP40
Regulatory Markings	CE, CCC, RoHS

PHOTOMETRICS

SPACE<sup>2</sup> XL tuneWHITE DOT LIGHT FIX

Beam Angle	Height (m)	E(0°)	E <sub>max</sub> (lx)			SPACE <sup>2</sup> XL DOTLIGHT FIX 18.9W / 12.6W / 6.3W		Luminous Flux (lm)
			24°	38°	50°	Input Power	CRI	4000K / 6500K 24°, 38°, 50°
24°	1	E(0°)	9324	4600	2808	18.9W	ProART CRI-95	1890
		Cone Ø (m)	0.44	0.68	0.92			
38°	2	E(0°)	2331	1150	702	12.6W	ProART CRI-95	1260
		Cone Ø (m)	0.89	1.35	1.85			
50°	3	E(0°)	1036	511	312	6.3W	ProART CRI-95	630
		Cone Ø (m)	1.33	2.03	2.77			
24°	4	E(0°)	583	288	175	Data are based on maximum output at highest CCT (4000K / 6500K). 2700K will have a nominal data value of 10% lower than published. 1800K will have a nominal data value of 30% lower than published. Nominal CRI-95, equals to Ra>90-97, R9>50		
		Cone Ø (m)	1.77	2.71	3.70			
38°	5	E(0°)	373	184	112			
		Cone Ø (m)	2.22	3.38	4.62			

Correction Factor: SPACE<sup>2</sup> XL DOTLIGHT FIX 12.6W - f = 0.67  
SPACE<sup>2</sup> XL DOTLIGHT FIX 6.3W - f = 0.33

ORDERING MATRIX CHART

Type	Fixture		LED Module					Driver				
	Angle	Colour	Input Power	Beam Angle	Colour Temp	CRI	Dimming					
SXL-DOT	FX	MB	18	24°	tuneWHITE 1800K-3100K	PA	DT8	DALI DT8				
								12	38°	tuneWHITE 1800K-4000K	CSB	Casambi
								6	50°	tuneWHITE 2700K-6500K		

example: SXL-DOT.FX.MB.18.24.30.PA.DA