


# SPACE<sup>2</sup> XL tuneWHITE

## MAGNETIC TRACK SERIES


A premium 48V powered extra low voltage magnetic track system with superior aesthetics and built quality. Space2 magnetic track series includes a selection of different luminaires forms that are magnetically attached onto the track and can be flexibly positioned or interchanged at any time for various illumination applications within spaces.

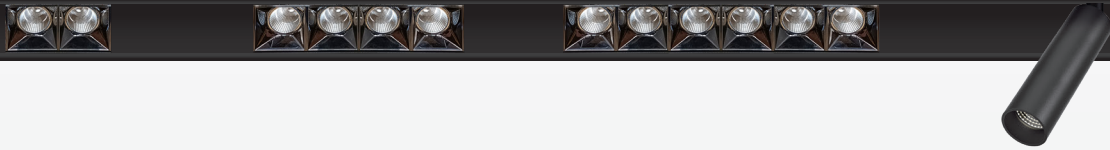

### Module Colour Temperature Variation



Beam Angle

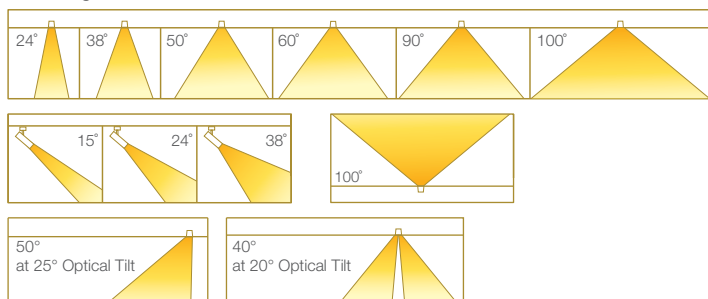

### Driver Dimming Variation




(DT8)



(CSB)


# SPACE<sup>2</sup> XL tuneWHITE LINE LIGHT FIX

37.8W / 18.9W MAGNETIC TRACK  
TUNABLE WHITE LUMINAIRE




### AVAILABLE OPTIONS

**FIXTURE**  
COLOUR OPTIONS

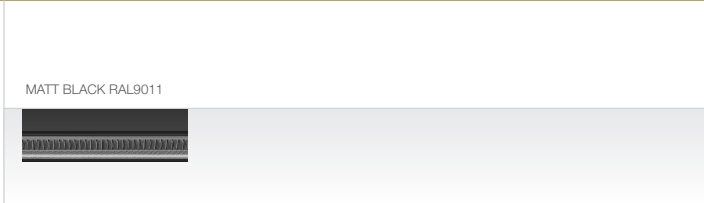

### DIMENSIONS (MM)

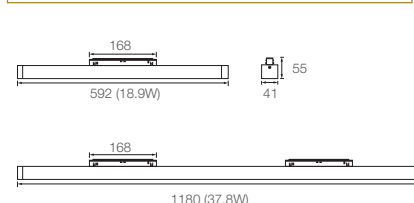

**LED MODULE**

tuneWHITE

1800K 3100K 1800K 4000K 2700K 6500K

tuneWHITE™ ProART


ASYMMETRIC

60° 90°

DOUBLE ASYMMETRIC

50° at 25° Optical Tilt 40° at 20° Optical Tilt

**DRIVER**  
DIMMING



SPECIFICATIONS

Family Type	Space <sup>2</sup> XL Series
Input Voltage	48V DC Constant Voltage
Input Power	18.9W, 12.6W, 6.3W
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10
Beam Angles	60°, 90°, asymmetric 50° (at 25° optical tilt), double asymmetric 40° (at 20° optical tilt)
Colour Temperatures	tuneWHITE 1800K - 3100K, tuneWHITE 1800K - 4000K, tuneWHITE 2700K - 6500K
CRI	ProART (CRI-95)
SDCM	3 steps MacAdam ellipse binning
Driver (Dimming)	DALI device type 8, CASAMBI
Mains Connection	Magnetic track
Materials	Aluminium, plastic
Fire Safety	VW-1
Flammability Mark	F
Ingress Protection	IP40
Regulatory Markings	CE, CCC, RoHS

PHOTOMETRICS

SPACE<sup>2</sup> XL tuneWHITE LINE LIGHT FIX

Height (m)	Emax (lx)	SPACE <sup>2</sup> XL LINE LIGHT FIX 37.8W / 18.9W		Luminous Flux (lm)
		37.8W / 18.9W	CRI	
1	E(0°)	1161	1494	4000K / 6500K 60°, 90°, Asymmetric 50°, Double Asymmetric 40°
	Cone Ø 0° (m)	1.21	1.98	
	Cone Ø 90° (m)	6.08	2.38	
2	E(0°)	290	374	3591
	Cone Ø 0° (m)	2.42	3.96	
	Cone Ø 90° (m)	12.17	4.77	
3	E(0°)	129	166	1796
	Cone Ø 0° (m)	3.63	5.94	
	Cone Ø 90° (m)	18.25	7.15	
4	E(0°)	73	93	
	Cone Ø 0° (m)	4.84	7.92	
	Cone Ø 90° (m)	24.33	9.53	
5	E(0°)	46	60	
	Cone Ø 0° (m)	6.06	9.90	
	Cone Ø 90° (m)	30.42	11.92	

Data are based on maximum output at highest CCT (4000K / 6500K). 2700K will have a nominal data value of 10% lower than published. 1800K will have a nominal data value of 30% lower than published.

Nominal CRI-95, equals to Ra>90-97, R9>50

Correction Factor: SPACE<sup>2</sup> XL LINE LIGHT FIX 18.9W - f = 0.50

ORDERING MATRIX CHART

Fixture				LED Module				Driver								
Type	Angle	Colour		Input Power	Beam Angle	Colour Temp	CRI	Dimming								
SXL-LINE	FX	Fix	MB	Matt Black	37	37.8W	60	60°	TW1831	tuneWHITE 1800K-3100K	PA	ProART	DT8	DALI DT8		
															18	18.9W
					A50	Asymmetric 50°	TW2765	tuneWHITE 2700K-6500K								
					DA40	Double Asymmetric 40°										

example: SXL-LINE.FX.MB.37.90.30.PA.DA