


# SPACE<sup>2</sup> XL tuneWHITE

## MAGNETIC TRACK SERIES


A premium 48V powered extra low voltage magnetic track system with superior aesthetics and built quality. Space2 magnetic track series includes a selection of different luminaires forms that are magnetically attached onto the track and can be flexibly positioned or interchanged at any time for various illumination applications within spaces.

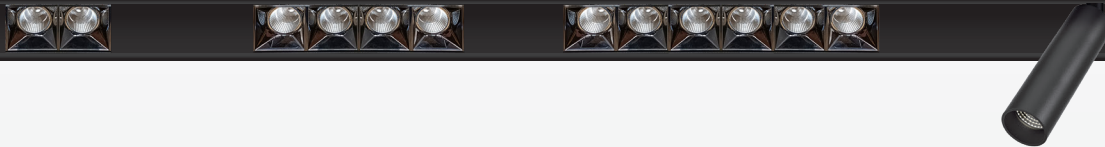

### Module Colour Temperature Variation



Beam Angle

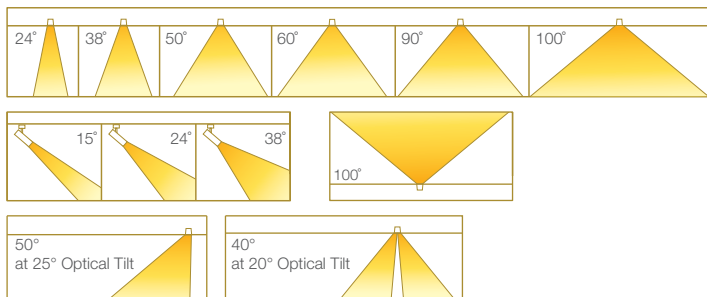

### Driver Dimming Variation



# SPACE<sup>2</sup> XL tuneWHITE OPAL LIGHT FIX


37.8W / 18.9W MAGNETIC TRACK  
TUNABLE WHITE LUMINAIRE

## AVAILABLE OPTIONS

### FIXTURE


#### COLOUR OPTIONS

MATT BLACK RAL9011



### LED MODULE


tuneWHITE



### DRIVER DIMMING



## DIMENSIONS (MM)

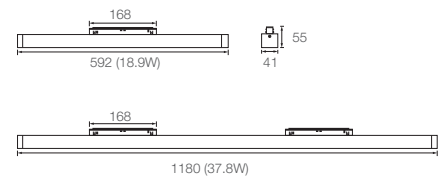

SPECIFICATIONS

Family Type	Space <sup>2</sup> XL Series
Input Voltage	48V DC Constant Voltage
Input Power	37.8W, 18.9W
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10
Beam Angles	100°
Colour Temperatures	tuneWHITE 1800K - 3100K, tuneWHITE 1800K - 4000K, tuneWHITE 2700K - 6500K
CRI	ProART (CRI-95)
SDCM	3 steps MacAdam ellipse binning
Driver (Dimming)	DALI device type 8, CASAMBI
Mains Connection	Magnetic track
Materials	Aluminium, plastic
Fire Safety	VW-1
Flammability Mark	F
Ingress Protection	IP40
Regulatory Markings	CE, CCC, RoHS

PHOTOMETRICS

SPACE<sup>2</sup> XL tuneWHITE OPAL LIGHT FIX

Height (m)	E(0°)	Cone Ø (m)	SPACE <sup>2</sup> XL OPAL LIGHT FIX 37.8W / 18.9W		Luminous Flux (lm)
			Input Power	CRI	4000K / 6500K
1	887	2.46	37.8W	ProART CRI-95	100°
					222
2	99	7.38	35	12.30	
					3
4	35	12.30	35	12.30	
					5

Data are based on maximum output at highest CCT (4000K / 6500K).  
2700K will have a nominal data value of 10% lower than published.  
1800K will have a nominal data value of 30% lower than published.  
Nominal CRI-95, equals to Ra>90-97, R9>50

Correction Factor: SPACE<sup>2</sup> XL OPAL LIGHT FIX 18.9W - f = 0.50

ORDERING MATRIX CHART

Type	Fixture		LED Module				Driver	
	Angle	Colour	Input Power	Beam Angle	Colour Temp	CRI	Dimming	
SXL-OPAL	FX   Fix	MB   Matt Black	37   37.8W	100   100°	TW1831   tuneWHITE 1800K-3100K	PA   ProART	DT8   DALI DT8	
			18   18.9W		TW1840   tuneWHITE 1800K-4000K		CSB   Casambi	
					TW2765   tuneWHITE 2700K-6500K			

example: SXL-OPAL.FX.MB.37.100.30.PA.DA