


SPACE² XL tuneWHITE

MAGNETIC TRACK SERIES


A premium 48V powered extra low voltage magnetic track system with superior aesthetics and built quality. Space2 magnetic track series includes a selection of different luminaires forms that are magnetically attached onto the track and can be flexibly positioned or interchanged at any time for various illumination applications within spaces.

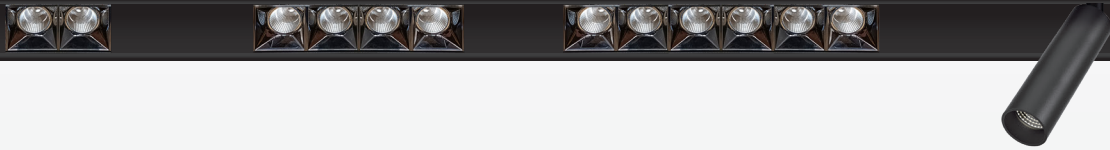


Module Colour Temperature Variation



Beam Angle

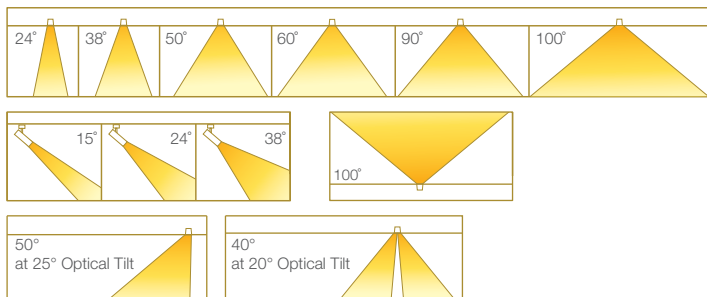

Driver Dimming Variation



SPACE² XL tuneWHITE PRISMATIC LIGHT FIX

37.8W / 18.9W MAGNETIC TRACK
TUNABLE WHITE LUMINAIRE




AVAILABLE OPTIONS

FIXTURE


COLOUR OPTIONS

MATT BLACK RAL9011



LED MODULE

tuneWHITE




DRIVER

DIMMING



DIMENSIONS (MM)

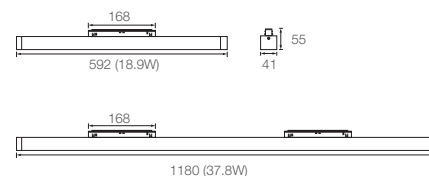

SPECIFICATIONS

Family Type	Space ² XL Series
Input Voltage	48V DC Constant Voltage
Input Power	37.8W, 18.9W
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10
Beam Angles	100°
Colour Temperatures	tuneWHITE 1800K - 3100K, tuneWHITE 1800K - 4000K, tuneWHITE 2700K - 6500K
CRI	ProART (CRI-95)
SDCM	3 steps MacAdam ellipse binning
Driver (Dimming)	DALI device type 8, Casambi
Mains Connection	Magnetic track
Materials	Aluminium, plastic
Fire Safety	VW-1
Flammability Mark	F
Ingress Protection	IP40
Regulatory Markings	CE, CCC, RoHS

PHOTOMETRICS

SPACE² XL tuneWHITE PRISMATIC LIGHT FIX

Height (m)	E(0°)	Cone Ø (m)	SPACE ² XL PRISMATIC LIGHT FIX 37.8W / 18.9W		Luminous Flux (lm)
			Input Power	CRI	4000K / 6500K
1	100°	1242	37.8W	ProART CRI-95	100°
	2.46	1575			
2	311		4.92	18.9W	ProART CRI-95
	78	9.84			
3	138	7.38	Data are based on maximum output at highest CCT (4000K / 6500K). 2700K will have a nominal data value of 10% lower than published. 1800K will have a nominal data value of 30% lower than published. Nominal CRI-95, equals to Ra>90-97, R9>50		
	50	12.30			
4	78	9.84			
	50	12.30			
5	50	12.30			
	12.30				

Correction Factor: SPACE² XL PRISMATIC LIGHT FIX 18.9W - f = 0.50

ORDERING MATRIX CHART

Type	Fixture		LED Module						Driver					
	Angle	Colour	Input Power		Beam Angle		Colour Temp		CRI		Dimming			
SXL-PRISM	FX	Fix	MB	Matt Black	37	37.8W	100	100°	TW1831	tuneWHITE 1800K-3100K	PA	ProART	DT8	DALI DT8
					18	18.9W	TW1840	tuneWHITE 1800K-4000K	CSB	Casambi				
							TW2765	tuneWHITE 2700K-6500K						

example: SXL-PRISM.FX.MB.37.100.30.PA.DA