


SPACE² XL tuneWHITE

MAGNETIC TRACK SERIES


A premium 48V powered extra low voltage magnetic track system with superior aesthetics and built quality. Space2 magnetic track series includes a selection of different luminaires forms that are magnetically attached onto the track and can be flexibly positioned or interchanged at any time for various illumination applications within spaces.

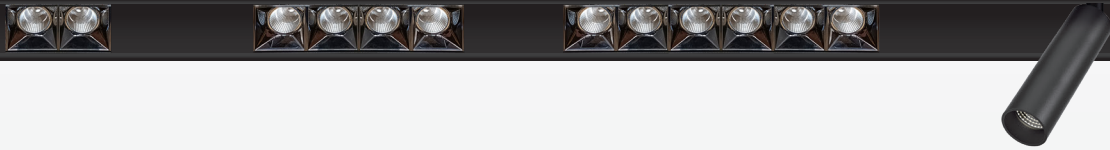

Module Colour Temperature Variation



Beam Angle

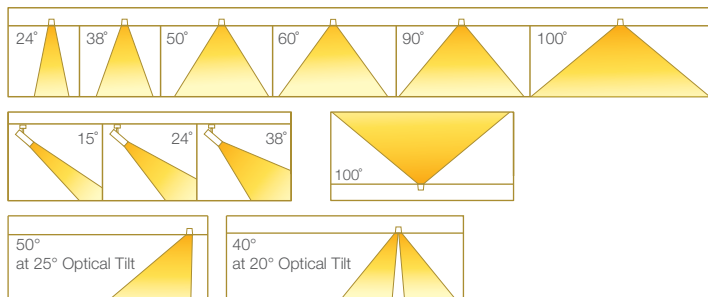

Driver Dimming Variation



(DT8)









(CSB)


SPACE² XL tuneWHITE SPOTLIGHT TILT

8W MAGNETIC TRACK TUNABLE WHITE LUMINAIRE



AVAILABLE OPTIONS	
FIXTURE COLOUR OPTIONS	<p>MATT BLACK RAL9011</p> 
ACCESSORIES	 <p>Honeycomb Anti-Glare Louvre</p>
LED MODULE	<p>tuneWHITE</p>  <p>1800K 3100K 1800K 4000K 2700K 6500K tuneWHITE™ ProART</p> 
DRIVER DIMMING	  <p>(DT8) (CSB)</p>

DIMENSIONS (MM)




SPECIFICATIONS

Family Type	Space ² XL Series
Input Voltage	48V DC Constant Voltage
Input Power	8W
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10
Beam Angles	24°, 38°
Colour Temperatures	tuneWHITE 1800K - 3100K, tuneWHITE 1800K - 4000K, tuneWHITE 2700K - 6500K
CRI	ProART (CRI-95)
SDCM	3 steps MacAdam ellipse binning
Driver (Dimming)	DALI device type 8, CASAMBI
Mains Connection	Magnetic track
Materials	Aluminium, plastic
Fire Safety	VW-1
Flammability Mark	F
Ingress Protection	IP40
Regulatory Markings	CE, CCC, RoHS

PHOTOMETRICS

SPACE² XL tuneWHITE SPOTLIGHT TILT

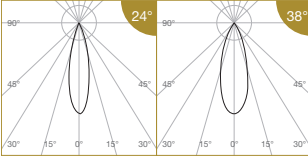

Height (m)		SPACE ² XL SPOTLIGHT TILT 8W		Luminous Flux (lm)
		24°	38°	
1	E(0°)	3939	1943	4000K / 6500K 24°, 38°
	Cone Ø (m)	0.44	0.68	
2	E(0°)	985	486	798
	Cone Ø (m)	0.89	1.35	
3	E(0°)	438	216	798
	Cone Ø (m)	1.33	2.03	
4	E(0°)	246	121	798
	Cone Ø (m)	1.77	2.71	
5	E(0°)	158	78	798
	Cone Ø (m)	2.22	3.38	

Data are based on maximum output at highest CCT (4000K / 6500K).
2700K will have a nominal data value of 10% lower than published.
1800K will have a nominal data value of 30% lower than published.
Nominal CRI-95, equals to Ra>90-97, R9>50

ORDERING MATRIX CHART

Type	Fixture				LED Module				Driver						
	Angle	Colour		Accessories		Input Power		Beam Angle		Colour Temp		CRI	Dimming		
SXL-SPOTLIGHT	TL Tilt	MB	Matt Black	N	None	8	8W	24	24°	TW1831	tuneWHITE 1800K-3100K	PA	ProART	DT8	DALI DT8
								38	38°	TW1840	tuneWHITE 1800K-4000K			CSB	Casambi
										TW2765	tuneWHITE 2700K-6500K				

example: SXL-SPOTLIGHT.TL.MB.N.8.15.30.PA.DA