



SPACE² XL

MAGNETIC TRACK SERIES


A premium 48V powered extra low voltage magnetic track system with superior aesthetics and built quality. Space2 magnetic track series includes a selection of different luminaires forms that are magnetically attached onto the track and can be flexibly positioned or interchanged at any time for various illumination applications within spaces.

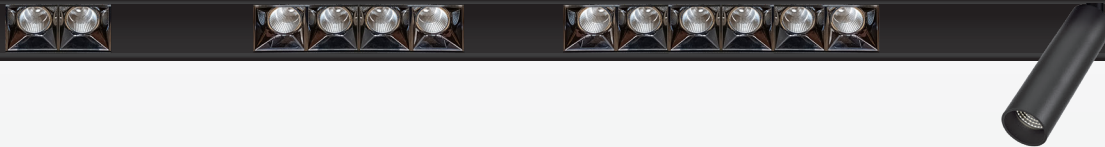

Module Colour Temperature Variation

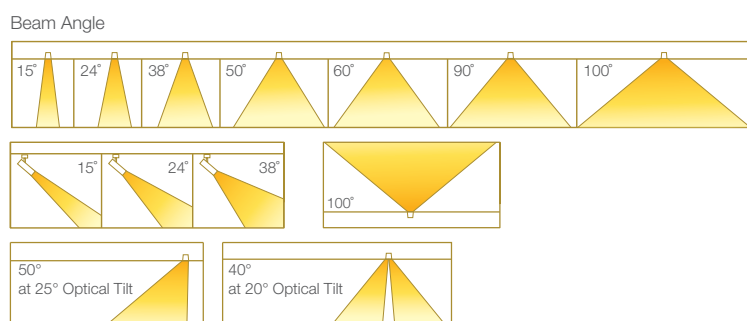

Driver Dimming Variation



SPACE² XL LINE LIGHT FIX

37.8W / 18.9W MAGNETIC TRACK LUMINAIRE




AVAILABLE OPTIONS

FIXTURE COLOUR OPTIONS

MATT BLACK RAL9011




DIMENSIONS (MM)




LED MODULE


SINGLE CCT



2700K 3000K 4000K ProART



DOUBLE ASYMMETRIC




50° at 25° Optical Tilt



40° at 20° Optical Tilt

DRIVER DIMMING



SPECIFICATIONS

Family Type	Space ² XL Series
Input Voltage	48V DC Constant Voltage
Input Power	18.9W, 12.6W, 6.3W
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10
Beam Angles	60°, 90°, asymmetric 50° (at 25° optical tilt), double asymmetric 40° (at 20° optical tilt)
Colour Temperatures	2700K, 3000K, 4000K
CRI	ProART (CRI-95)
SDCM	3 steps MacAdam ellipse binning
Driver (Dimming)	Non-dim, 0-10V, DALI, CASAMBI
Mains Connection	Magnetic track
Materials	Aluminium, plastic
Fire Safety	VW-1
Flammability Mark	F
Ingress Protection	IP40
Regulatory Markings	CE, CCC, RoHS

PHOTOMETRICS

SPACE² XL LINE LIGHT FIX

Height (m)		Emax (lx)		SPACE ² XL LINE LIGHT FIX 37.8W / 18.9W		Luminous Flux (lm)
		60°	90°	37.8W / 18.9W	CRI	3000K
1	E(0°)	1106	1423	37.8W	ProART CRI-95	3420
	Cone Ø 0° (m)	1.21	1.98			
	Cone Ø 90° (m)	6.08	2.38			
2	E(0°)	277	356	18.9W	ProART CRI-95	1710
	Cone Ø 0° (m)	2.42	3.96			
	Cone Ø 90° (m)	12.17	4.77			
3	E(0°)	123	158	<small>Data are based on 3000K (ProART CRI-95). Nominal data of 2700K and 3500K are shared with 3000K. Higher CCT of 4000K and 5000K will have a nominal data value of 5% higher than published. (f = 1.05)</small> <small>Nominal CRI-95, equals to Ra>90-97, R9>50</small>		
	Cone Ø 0° (m)	3.63	5.94			
	Cone Ø 90° (m)	18.25	7.15			
4	E(0°)	69	89			
	Cone Ø 0° (m)	4.84	7.92			
	Cone Ø 90° (m)	24.33	9.53			
5	E(0°)	44	57			
	Cone Ø 0° (m)	6.06	9.90			
	Cone Ø 90° (m)	30.42	11.92			

Correction Factor: SPACE² XL LINE LIGHT FIX 18.9W - f = 0.50

ORDERING MATRIX CHART

Fixture			LED Module				Driver					
Type	Angle	Colour	Input Power		Beam Angle	Colour Temp	CRI	Dimming				
SXL-LINE	FX Fix	MB Matt Black	37	37.8W	60	60°	27	2700K	PA ProART	ND	Non-Dim	
				18	18.9W	90	90°	30		3000K	AN	0-10V
							A50	Asymmetric 50°	40	4000K		DALI
							DA40	Double Asymmetric 40°				Casambi

example: SXL-LINE.FX.MB.37.90.30.PA.DA