



SPACE² XL

MAGNETIC TRACK SERIES


A premium 48V powered extra low voltage magnetic track system with superior aesthetics and built quality. Space2 magnetic track series includes a selection of different luminaires forms that are magnetically attached onto the track and can be flexibly positioned or interchanged at any time for various illumination applications within spaces.

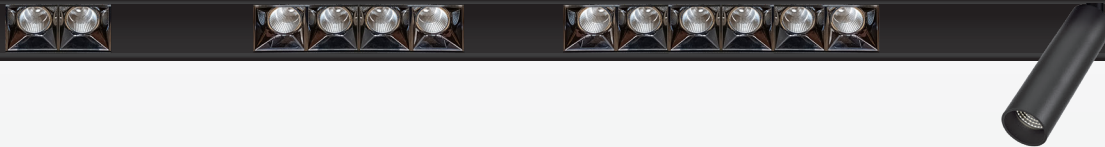

Module Colour Temperature Variation

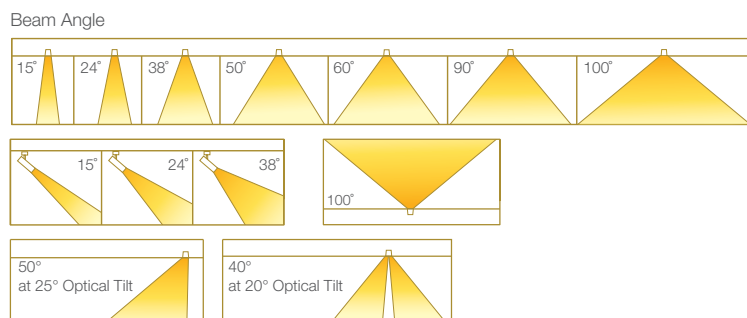











Driver Dimming Variation

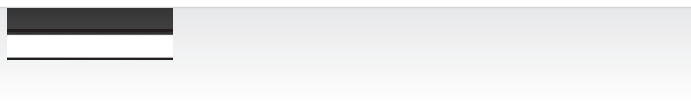


SPACE² XL OPAL LIGHT FIX

37.8W / 18.9W MAGNETIC TRACK LUMINAIRE



AVAILABLE OPTIONS	
FIXTURE COLOUR OPTIONS	<p>MATT BLACK RAL9011</p> 
LED MODULE	<p>SINGLE CCT</p> <p>  2700K  3000K  4000K  ProART </p> 
DRIVER DIMMING	<p>  (ND)  (AN)  (DA)  (CSB) </p>

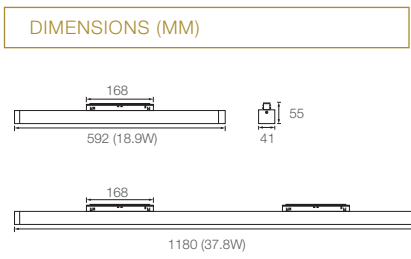


SPECIFICATIONS

Family Type	Space ² XL Series
Input Voltage	48V DC Constant Voltage
Input Power	37.8W, 18.9W
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10
Beam Angles	100°
Colour Temperatures	2700K, 3000K, 4000K
CRI	ProART (CRI-95)
SDCM	3 steps MacAdam ellipse binning
Driver (Dimming)	Non-dim, 0-10V, DALI, CASAMBI
Mains Connection	Magnetic track
Materials	Aluminium, plastic
Fire Safety	VW-1
Flammability Mark	F
Ingress Protection	IP40
Regulatory Markings	CE, CCC, RoHS

PHOTOMETRICS

SPACE² XL OPAL LIGHT FIX



Height (m)	E(0°)	Cone Ø (m)	SPACE ² XL OPAL LIGHT FIX 37.8W / 18.9W		
			Input Power	CRI	3000K
1	845	2.46	37.8W	ProART CRI-95	100°
	211	4.92			2140
2	94	7.38	18.9W	ProART CRI-95	1070
	53	9.84			
3	34	12.30			

Data are based on 3000K (ProART CRI-95). Nominal data of 2700K and 3500K are shared with 3000K. Higher CCT of 4000K and 5000K will have a nominal data value of 5% higher than published. (f = 1.05)
Nominal CRI-95, equals to Ra>90-97, R9>50

Correction Factor: SPACE² XL OPAL LIGHT FIX 18.9W - f = 0.50

ORDERING MATRIX CHART

Fixture			LED Module				Driver						
Type	Angle	Colour	Input Power		Beam Angle	Colour Temp		CRI	Dimming				
SXL-OPAL	FX	MB	37	37.8W	100	100°	27	2700K	PA	ProART	ND	Non-Dim	
				18			18.9W	30			3000K	AN	0-10V
								40			4000K	DA	DALI
												CSB	Casambi

example: SXL-OPAL.FX.MB.37.100.30.PA.DA