


SPACE2 XL


MAGNETIC TRACK SERIES

A premium 48V powered extra low voltage magnetic track system with superior aesthetics and built quality. Space2 magnetic track series includes a selection of different luminaires forms that are magnetically attached onto the track and can be flexibly positioned or interchanged at any time for various illumination applications within spaces.

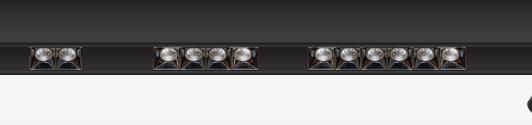

Module Colour Temperature Variation



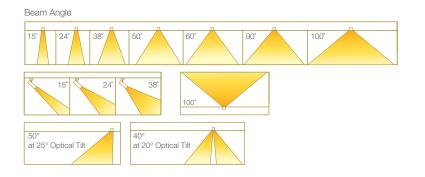

Driver Dimming Variation









ND)


(DA)

(CS



SPACE² XL PRISMATIC LIGHT FIX

37.8W / 18.9W MAGNETIC TRACK LUMINAIRE

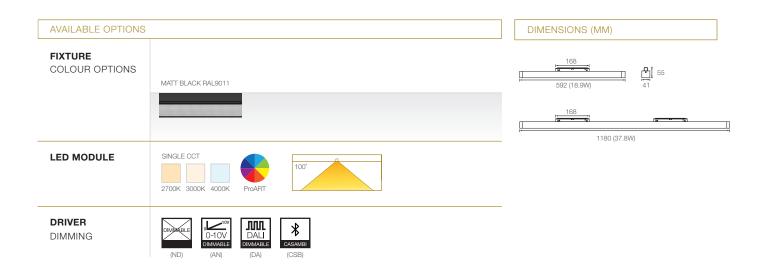






SPECIFICATIONS

Family Type	Space ² XL Series					
Input Voltage	48V DC Constant Voltage					
Input Power	37.8W, 18.9W					
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10					
Beam Angles	100°					
Colour Temperatures	2700K, 3000K, 4000K					
CRI	ProART (CRI~95)					
SDCM	3 steps MacAdam ellipse binning					
Driver (Dimming)	Non-dim, 0-10V, DALI, CASAMBI					
Mains Connection	Magnetic track					
Materials	Aluminium, plastic					
Fire Safety	VW-1					
Flammability Mark	F					
Ingress Protection	IP40					
Regulatory Markings	CE, CCC, RoHS					

PHOTOMETRICS

SPACE² XL PRISMATIC LIGHT FIX



Correction Factor: $\textit{SPACE}^{2}\textit{XL}\textit{ PRISMATIC LIGHT FIX } 18.9W \sim f = 0.50$

SPACE ² XL PRISM						
land Davis	CRI					
Input Power	GRI 					
37.8W	ProART CRI~95	3000				
18.9W	ProART CRI~95	1500				

Nominal CRI~95, equals to Ra>90-97, R9>50

ORDERING MATRIX CHART

Fixture					LED Module								Driver	
Туре	Angle			Colour	Input Power		Bean	n Angle	Colour Temp		CRI		Dimming	
SXL-PRISM														
	FX	Fix	МВ	Matt Black	37	37.8W	100	100°	27	2700K	PA	ProART	ND	Non-Dim
					18	18.9W			30	3000K			AN	0-10V
									40	4000K			DA	DALI
													CSB	Casambi

example: SXL-PRISM.FX.MB.37.100.30.PA.DA

9