



# SPACE<sup>2</sup> XL

## MAGNETIC TRACK SERIES

A premium 48V powered extra low voltage magnetic track system with superior aesthetics and built quality. Space2 magnetic track series includes a selection of different luminaires forms that are magnetically attached onto the track and can be flexibly positioned or interchanged at any time for various illumination applications within spaces.

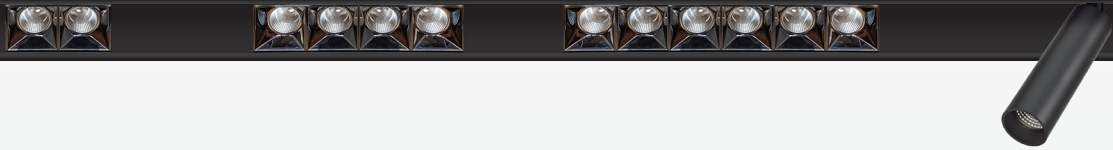

### Module Colour Temperature Variation

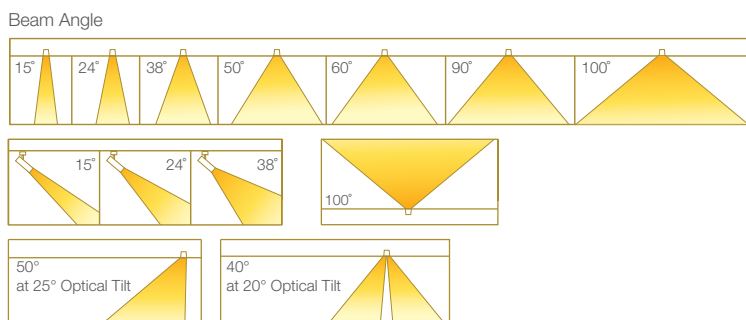

### Driver Dimming Variation



# SPACE<sup>2</sup> XL SPOTLIGHT TILT

8W MAGNETIC TRACK LUMINAIRE



### AVAILABLE OPTIONS

#### FIXTURE

##### COLOUR OPTIONS

MATT BLACK RAL9011



#### ACCESSORIES



Honeycomb  
Anti-Glare Louvre

#### LED MODULE


SINGLE CCT




2700K 3000K 4000K



ProART



### DIMENSIONS (MM)



#### DRIVER DIMMING



(ND)



(AN)



(DA)



(CSB)

SPECIFICATIONS

Family Type	Space <sup>2</sup> XL Series
Input Voltage	48V DC Constant Voltage
Input Power	8W
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10
Beam Angles	15°, 24°, 38°
Colour Temperatures	2700K, 3000K, 4000K
CRI	ProART (CRI-95)
SDCM	3 steps MacAdam ellipse binning
Driver (Dimming)	ND, AN, DA, CSB
Mains Connection	Magnetic track
Materials	Aluminium, plastic
Fire Safety	VW-1
Flammability Mark	F
Ingress Protection	IP40
Regulatory Markings	CE, CCC, RoHS

PHOTOMETRICS

SPACE<sup>2</sup> XL SPOTLIGHT TILT

Height (m)	E(0°)	E <sub>max</sub> (lx)			SPACE <sup>2</sup> XL SPOTLIGHT TILT 8W		Luminous Flux (lm)
		15°	24°	38°	Input Power	CRI	3000K
1		6137	3751	1850	8W	ProART CRI-95	15°, 24°, 38°
	Cone Ø (m)	0.30	0.44	0.68			
2		1534	938	463	8W	ProART CRI-95	760
	Cone Ø (m)	0.60	0.89	1.35			
3		682	417	206	8W	ProART CRI-95	760
	Cone Ø (m)	0.90	1.33	2.03			
4		384	234	116	8W	ProART CRI-95	760
	Cone Ø (m)	1.20	1.77	2.71			
5		245	150	74	8W	ProART CRI-95	760
	Cone Ø (m)	1.50	2.22	3.38			

Data are based on 3000K (ProART CRI-95). Nominal data of 2700K and 3500K are shared with 3000K. Higher CCT of 4000K and 5000K will have a nominal data value of 5% higher than published. (f = 1.05)  
Nominal CRI-95, equals to Ra>90-97, R9>50

ORDERING MATRIX CHART

Type	Angle	Fixture			Accessories	LED Module				Driver			
		Colour				Input Power	Beam Angle	Colour Temp	CRI	Dimming			
SXL-SPOTLIGHT	TL Tilt	MB Matt Black	N	None	8 8W	15	15°	27	2700K	PA	ProART	ND	Non-Dim
						24	24°	30	3000K			AN	0-10V
						38	38°	40	4000K			DA	DALI
												CSB	Casambi

example: SXL-SPOTLIGHT.TL.MB.N.8.15.30.PA.DA