



SPACE² XL

MAGNETIC TRACK SERIES

A premium 48V powered extra low voltage magnetic track system with superior aesthetics and built quality. Space2 magnetic track series includes a selection of different luminaires forms that are magnetically attached onto the track and can be flexibly positioned or interchanged at any time for various illumination applications within spaces.

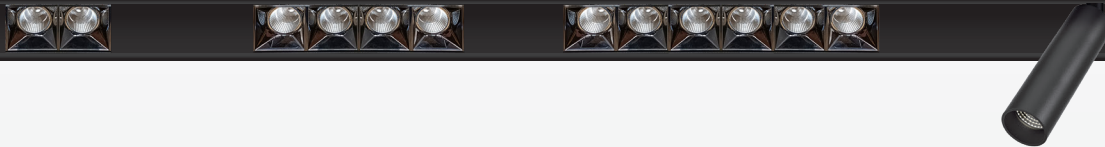

Module Colour Temperature Variation

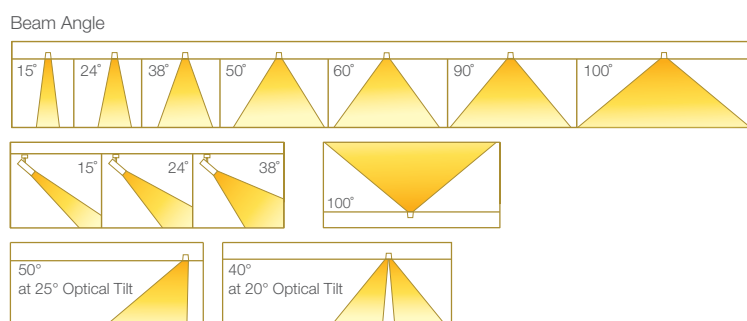











Driver Dimming Variation

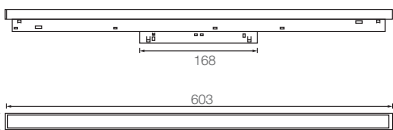

SPACE² XL UPLIGHT FIX

15W MAGNETIC TRACK LUMINAIRE



AVAILABLE OPTIONS		DIMENSIONS (MM)		
FIXTURE COLOUR OPTIONS	MATT BLACK RAL9011			
				
LED MODULE	SINGLE CCT 			
	 ProART			
DRIVER DIMMING	 (ND)	 (AN)	 (DA)	 (CSB)

SPECIFICATIONS

Family Type	Space ² XL Series
Input Voltage	48V DC Constant Voltage
Input Power	15W
Lifetime	50,000 hours (80% lumen maintenance at Ta = 25°C), B10
Beam Angles	100°
Colour Temperatures	2700K, 3000K, 4000K
CRI	ProART (CRI-95)
SDCM	3 steps MacAdam ellipse binning
Driver (Dimming)	Non-dim, 0-10V, DALI, CASAMBI
Mains Connection	Magnetic track
Materials	Aluminium, plastic
Fire Safety	VW-1
Flammability Mark	F
Ingress Protection	IP40
Regulatory Markings	CE, CCC, RoHS

PHOTOMETRICS

SPACE² XL UPLIGHT FIX

Height (m)		E _{max} (lx)	SPACE ² XL UPLIGHT FIX 15W		Luminous Flux (lm)
			Input Power	CRI	3000K
1	E(0°)	418	15W	ProART CRI-95	100° 840
	Cone Ø 0° (m)	2.33			
	Cone Ø 90° (m)	1.51			
2	E(0°)	105	<small>Data are based on 3000K (ProART CRI-95). Nominal data of 2700K and 3500K are shared with 3000K. Higher CCT of 4000K and 5000K will have a nominal data value of 5% higher than published. (f = 1.05) Nominal CRI-95, equals to Ra>90-97, R9>50</small>		
	Cone Ø 0° (m)	4.67			
	Cone Ø 90° (m)	3.03			
3	E(0°)	46			
	Cone Ø 0° (m)	7.00			
	Cone Ø 90° (m)	4.54			
4	E(0°)	26			
	Cone Ø 0° (m)	9.33			
	Cone Ø 90° (m)	6.05			
5	E(0°)	17			
	Cone Ø 0° (m)	11.67			
	Cone Ø 90° (m)	7.57			

ORDERING MATRIX CHART

Type	Fixture		LED Module						Driver			
	Angle	Colour	Input Power		Beam Angle		Colour Temp		CRI		Dimming	
SXL-UPLIGHT	FX	MB	15	15W	100	100°	27	2700K	PA	ProART	ND	Non-Dim
							30	3000K			AN	0-10V
							40	4000K			DA	DALI
							CSB	Casambi				

example: SXL-UPLIGHT.FX.MB.15.100.30.PA.DA