








PLEASE MAKE SURE THAT MAINS IS DISCONNECTED BEFORE PROCEEDING!

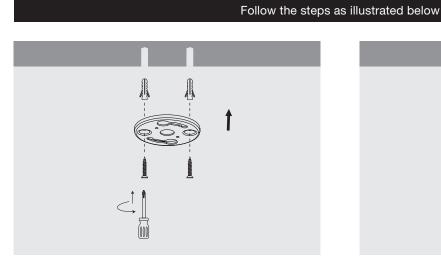



1. Install bracket to the ceiling. 2. Connect the wire & snap in the safety cable.



3. Have fixture in-line & turn clockwise to lock. Installation complete.

For connection between ELR LED modules and drivers, please refer to LED Module Installation Guide.

SAFETY WARNING	DIMMER COMPATIBILITY DECLARATION	Snoop 4 Accessories Mounting and Filler	
 Luminaires MUST be installed by licensed electrician in accordance with local standards. 	Our Luminaires are designed for industry and home commonly used standard phase dimmers for best		
 LED modules MUST ONLY be connected to supplied LED drivers. It is not compatible with 	lighting effect achievement to provide added value to customers.	Height: 6mm	Height: 3mm + 3mm
any other type of driver. Failure to adhere to this may cause damage and void warranty.	However, with thousands of dimmer models available in the market today, 100% compatibility cannot be guaranteed. In order to avoid disappointment, it is advised to use dimmer models that have been tested to		
 DO NOT COVER lamp or driver under any circumstances. 			
 Ensure mains supply is not energised and/or is disconnected prior to installation/ connection/disconnection of LED module from LED driver. 	be compatible. The latest information on dimming compatibility is available within our Dimmer Compatibility Card and can be obtained through our website and local distributors.		
 Luminaires must not be Megger tested or connected during any in-circuit testing. 	If any intended dimmer model to be used is not listed in our Dimmer Compatibility Card, kindly contact us and send in the dimmer to be tested. We will respond within the shortest possible time and advise on the compatibility with our luminaires.	Honeycomb Filler Anti-Glare Louvre	Linear Spread Soft Lens Lens + Filler + Filler
 No user serviceable parts. Do not attempt to disassemble or repair lamp or driver. 		1	
 Do not use in flammable or explosive environments. 	We will not be responsible for all losses due to the		*
 Do not attempt to modify luminaires or supplied wiring in any way. 	incompatibility of the dimmer with our luminaires. Incompatibility includes abnormal operations i.e., flicker, throb, delayed on/off, failure, narrow dimming ranges,	Reflector	
 Allow suitable air flow and ventilation around the luminaire. 	etc. and are not limited to the above mentioned conditions.		