

evolution




NEW

50 CLASSIC / 50 PRO

Lumen Output **up to 1500lm** | LED Lamp Power **10W / 12W**

Size: H80 x Ø51 (mm)

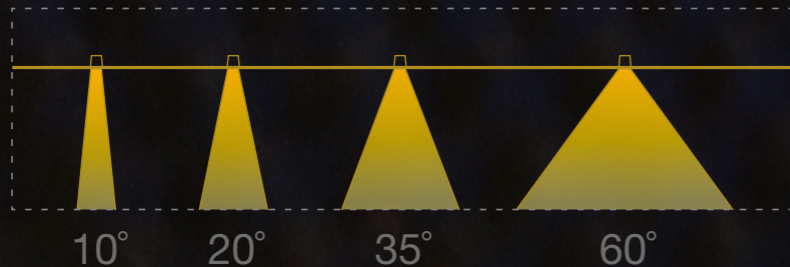

Colour rendering index:

NEW

ProART98 Ra~98
nominal CRI ~98, equal to Ra >97-99, R9 > 98

ProART Ra~95
nominal CRI ~95, equal to Ra >90-97, R9 > 50

Standard Ra~85
nominal CRI ~85, equal to Ra >80-87, R9 > 0

The new generation of 50 CLASSIC and 50 PRO LED modules is slimmer with a smaller form factor yet maintaining its performance, technology and features. With a smaller heatsink, it can now be fitted into more variety of fixtures to provide more options.

Now the 50 CLASSIC and 50 PRO are also available in ProART98, producing light that is closely matched to natural sunlight, with extremely high colour rendition of Ra~98, R9~98, fidelity index of Rf≥98 and gamut index of RG≥98.

Now you can illuminate objects to show its true colours!



Technology and Features



Advanced Thermal Protection System




Converging Optical Lens Maximising LOR



Low Flicker, No Risk (IEEE 1789)

Single CCT and Variable CCT

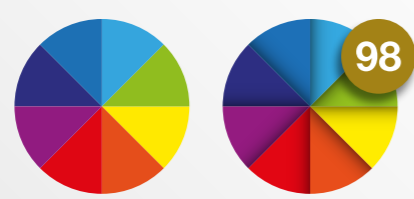


High colour rendition in Ra~95 or Ra~98



Colour temperature reduces in conjunction with dimming



Tuning of colour temperature with DALI DT8

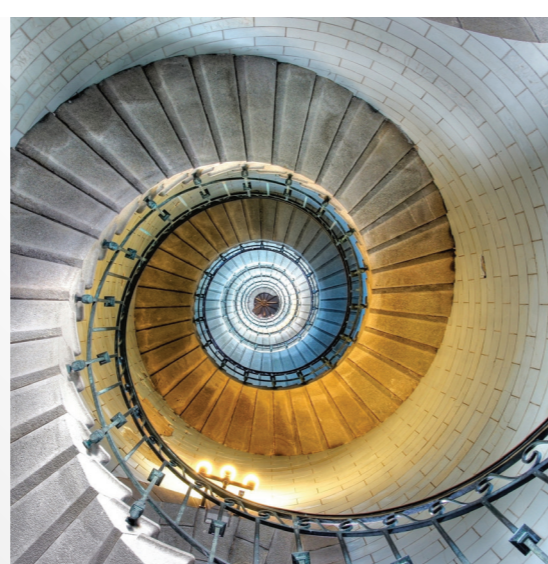

Select any desired colour temperature from 1800K to 6500K


Driver with Different Dimming Protocols



(ND)



(PH)



(AN)



(DA)

[FIND OUT MORE](#)